
Mounting Instructions

HITACHI PDADJ PLASMA MOUNT For sizes 32", 37", 42" & 50"

- 1. Please read your plasma screen instruction manual prior to installation of this product, carefully noting safety concerns regarding installation location.
- 2. Always have 2 people working on the installation
- 3. Care must be taken, that the wall to be used, is of sufficient strength. Only fix to solid timber studs, or to brickwork
- 4. Install wall plate (Part 1) in required position, using heavy duty screws or concrete anchors. Pay particular attention to keep the plate level.
- 5. Install cabling, according to your manufacturer's instructions.
- 6. Loosen angle adjusting nuts, and pull pivots forward. (see fig 1)
- 7. Remove the 6mm retaining screws (see fig 2) and lift off parts 3 (see fig 3) and fix to the back of the TV panel using bolts provided (see fig 4)
- 8. Employing 2 people, lift the TV panel, and hook onto the pivot brackets.
- 9. Refit the two 6mm retaining screws into pivot brackets (parts 2& 3)
- 10. Tilt panel to desired viewing angle (from 0° 20°) and tighten locknuts (see fig 1)
- 11. Finalise all electrical connections.

Parts List



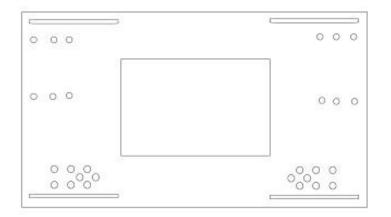












000

Part 4

Part 5



Loosen angle-adjusting nuts (shown in green) on both sides, and pull pivots forward.





Remove 6mm retaining screws (indicated above in red), which hold parts 2 & 3 together.

Fig 3




Remove part 3, by lifting (as shown above) and fix to the back of the TV panel, using the bolts provided.



Please Note: The Hitachi PDADJ bracket is factory set for the 50" panel For 32" size see fig 5, and for 37" and 42" sizes see fig 6.


Fig 5 Mounting points



Using parts 5, mount into the holes marked Red Using parts 6, mount into the holes marked Green

Fig 6

Mounting points



Using parts 4, mount into the holes marked Red Using parts 6, mount into the holes marked Green

PDADJ Adjustable Wall Mount Measurements

